




SOLUTIONS FOR PENETRATIONS: ZEMENTOL BAB/ BAN gully



Size:
See sketch




Description:

- ZEMENTOL BAB and ZEMENTOL BAN gullies can be directly connected to preinstalled tubes, due to their auto-waterproofing design.
- Both auto-waterproof gullies can be directly encased in concrete.
- The ZEMENTOL BAB trafficable gully can tolerate up to 1.5t of wheel load. This gully can be used in slabs and decks. The ZEMENTOL BAB gully includes a fixture for extra-strong floor screeds. The gully has an odour trap to prevent it from freezing. The special plastic material is corrosion-proof and maintenance-free. The gully is chemically resistant to the usual substances.
- The ZEMENTOL BAN gully is used for dewatering in interior zones. It is equipped with a stainless steel grid for the use in rooms with high-quality finishing. It has an odour trap and a fixture for extra-strong floor screeds.

Material and components:

- BAN: PE plastic body, zinc-plated grid.
- BAB: plastic body, stainless steel grid.

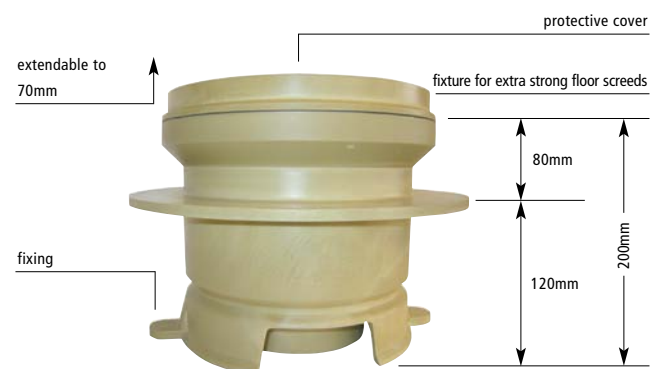

Installation:

- After placing the ZEMENTOL BAB or BAN gully on the tube to be connected, the gully is attached using the fixation points to prevent floating. The same method is used for installation in decks.
- After placing the concrete, the polystyrene cover is removed and the grid is placed on the body.
- The fixture for extra-strong floor screeds can be removed. If used, the fixture should be installed after casting-in the gully.